

Alfa Laval T35

Gasketed plate heat exchanger for a wide range of applications

Introduction

Alfa Laval Industrial line is a wide product range that is used in virtually all types of industry.

Designed for high throughput, this model delivers excellent thermal performance. A large selection of plate and gasket types is available.

Applications

- · Biotech and Pharmaceutical
- Chemicals
- Energy and Utilities
- Food, Dairy and Beverages
- Home and Personal care
- HVAC and Refrigeration
- Machinery and Manufacturing
- Marine and Transportation
- Mining, Minerals and Pigments
- Pulp and Paper
- Semiconductor and Electronics
- Steel
- Water and Waste treatment

Benefits


- High energy efficiency low operating cost
- Flexible configuration heat transfer area can be modified
- Easy to install compact design
- High serviceability easy to open for inspection and cleaning and easy to clean by CIP
- Access to Alfa Laval's global service network

Features

Every detail is carefully designed to ensure optimal performance, maximum uptime and easy maintenance. Selection of available features, depending on configuration some features may not be applicable:



- Five-point alignment
- · Reinforced hanger
- T-bar roller
- CurveFlowTM distribution area
- · Glued gasket
- PowerArcTM plate pattern divider
- ClipGripTM gasket attachment

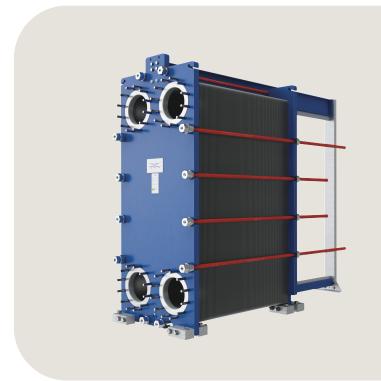

- Offset gasket groove
- OmegaPortTM noncircular port holes
- Leak chamber
- · Bearing boxes
- Fixed bolt head
- Key hole bolt opening
- Lifting lug
- Lining
- · Lock washer
- · Swing feet
- Tightening bolt cover

Alfa Laval 360° Service Portfolio

Our extensive service offering ensure top performance from your Alfa Laval equipment throughout its life cycle. The Alfa Laval 360 Service Portfolio include installation services, cleaning and repair as well as spare parts, technical documentation and trouble shooting. We also offer replacement, retrofit, integrity testing, monitoring and much more.


For information about our complete service offering and how to contact us - please visit www.alfalaval.com/service.


General remarks for technical information

- The global offering presented in this leaflet may not be available for all regions
- All combinations may not be configurable

Dimensional drawing

Measurements mm (inches)





Frame type	Н	W	h
FL, ALS	2875 (113.2")	1174 (46.2")	403 (15.9")
FM, ALS, PED,	0075 (440.0%)	1174 (40 02)	400 (45 0")
Marine ¹	2875 (113.2")	1174 (46.2")	403 (15.9")
FG, ALS, ASME,	2875 (113.2")	1174 (46.2")	403 (15.9")
PED	2073 (113.2)	1174 (40.2)	403 (13.9)
FD, ALS, ASME,	2875 (113.2")	1174 (46.2")	403 (15.9")
PED	2013 (113.2)	1174 (40.2)	403 (13.9)
FS, PED	2875 (113.2")	1174 (46.2")	403 (15.9")
FS, ASME	2875 (113.2")	1187 (46.7")	403 (15.9")

 $^{^{\}rm 1}$ Marine includes the PV-codes: ABS, BV, CCS, ClassNK, DNV, KR, LR, RINA, and RMRS.

The number of tightening bolts may vary depending on pressure rating.

Technical data

riales	туре	riee channel, min (inches)
T35-P	Single plate	3.4 (0.13)
Materials	5	
Heat transfer plates		304/304L, 316/316L, 904L, 254
		C-276, C-2000
		G-30
		Ti, TiPd
Field gaskets		NBR, EPDM, FKM, HeatSeal
Flange connections		Carbon steel
		Metal lined: stainless steel Alloy 316, titanium
Frame and pressure plate		Carbon steel, epoxy painted

Other materials may be available on request

Operational data

Frame type	Max. design pressure (barg/psig)	Max. design temperature (°C/°F)
FL, pvcALS	6.0/87	100/212
FM, pvcALS	10.3/150	120/248
FM, PED	10.3/150	180/356
FM, Marine ¹	10.0/145	100/212
FG, pvcALS	16.0/232	180/356
FG, ASME	10.3/150	250/482
FG, PED	16.0/232	180/356
FD, pvcALS	25.0/362	180/356
FD, ASME	20.7/300	250/482

 $^{^{\}rm 1}$ Marine standard includes the standards: ABS, BV, CCS, ClassNK, DNV, KR, LR, RINA, and RMRS.

Frame type	Max. design pressure (barg/psig)	Max. design temperature (°C/°F)
FD, PED	25.0/362	180/356
FS, ASME	27.6/400	250/482
FS, PED	30.0/435	180/356

 $^{^{\}rm 1}$ Marine standard includes the standards: ABS, BV, CCS, ClassNK, DNV, KR, LR, RINA, and RMRS.

Extended pressure and temperature rating may be available on request.

Flange connections

Frame type	Connection standard
	EN 1092-1 DN300 PN10
	EN 1092-1 DN350 PN10
FL, pvcALS	ASME B16.5 Class 150 NPS 12
I L, PVCALS	ASME B16.5 Class 150 NPS 14
	JIS B2220 10K 300A
	JIS B2220 10K 350A
	EN 1092-1 DN300 PN10
	EN 1092-1 DN350 PN10
EM pyoALS	ASME B16.5 Class 150 NPS 12
FM, pvcALS	ASME B16.5 Class 150 NPS 14
	JIS B2220 10K 300A
	JIS B2220 10K 350A
	EN 1092-1 DN300 PN10
EM DED	EN 1092-1 DN350 PN10
FM, PED	ASME B16.5 Class 150 NPS 12
	ASME B16.5 Class 150 NPS 14
	EN 1092-1 DN300 PN10
	EN 1092-1 DN350 PN10
FM, Marine ¹	ASME B16.5 Class 150 NPS 6
	JIS B2220 10K 300A
	JIS B2220 10K 350A
	EN 1092-1 DN300 PN16
	EN 1092-1 DN350 PN16
50 110	ASME B16.5 Class 150 NPS 12
FG, pvcALS	ASME B16.5 Class 150 NPS 14
	JIS B2220 16K 300A
	JIS B2220 16K 350A
50, 4045	ASME B16.5 Class 150 NPS 12
FG, ASME	ASME B16.5 Class 150 NPS 14
	EN 1092-1 DN300 PN16
FO. DED	EN 1092-1 DN350 PN16
FG, PED	ASME B16.5 Class 150 NPS 12
	ASME B16.5 Class 150 NPS 14
	EN 1092-1 DN300 PN25
	EN 1092-1 DN350 PN25
FD 41.0	ASME B16.5 Class 300 NPS 12
FD, pvcALS	ASME B16.5 Class 300 NPS 14
	JIS B2220 20K 300A
	JIS B2220 20K 350A
ED AOME	ASME B16.5 Class 300 NPS 12
FD, ASME	ASME B16.5 Class 300 NPS 14
	EN 1092-1 DN300 PN25
	EN 1092-1 DN350 PN25
FD, PED	ASME B16.5 Class 300 NPS 12
	ASME B16.5 Class 300 NPS 14
EO AOME	ASME B16.5 Class 400 NPS 12
FS, ASME	ASME B16.5 Class 400 NPS 14
	ASME B16.5 Class 300 NPS 12
	ASME B16.5 Class 300 NPS 14
FS, PED	ASME B16.5 Class 400 NPS 12

 $^{^{\}rm 1}$ Marine includes the standards: ABS, BV, CCS, DNV, ClassNK, KR, LR, RINA, and RMRS.

Standard EN1092-1 corresponds to GOST 12815-80 and GB/T 9115.

